

210L

TANK VOLUME



PEOPLE

24-31

STCS

4.90

MAX COP

70°C

MAX TEMP.



Compact size that fits the same install footprint as an electric 250L, for quick and easy upgrading.



350% efficiency rating reduces annual running costs versus gas and electric water heaters.



Registered Clean Energy product with annual carbon reduction rating of 3 tonnes.



Non-sacrificial impressed current anode provides protection in soft and hard water conditions.



Integrate and maximise your Solar PV with in-built timer controlled heat up cycles.



Hybrid technology with four unique heating modes, to match household demand.



R290 natural refrigerant with effectively zero global warming potential compared to synthetics.




Federal & State rebates available

1300 769 904  
[www.aquatechheatpumps.com.au](http://www.aquatechheatpumps.com.au)



Aquatech systems come backed by a 5-year replacement warranty, which covers all system components, including the tank and compressor. If the system should experience an unrepairable fault within the warranty period, we will provide a free replacement system.

### STC VALUES




- Zone 1 = 25 STCs
- Zone 2 = 23 STCs
- Zone 3 = 29 STCs
- Zone 4 = 31 STCs
- Zone 5 = 31 STCs

### SYSTEM CAPACITY

- Continuous Tariff
- Shoulder Tariff
- Solar PV/Timers

### INSTALLATION PARAMETERS

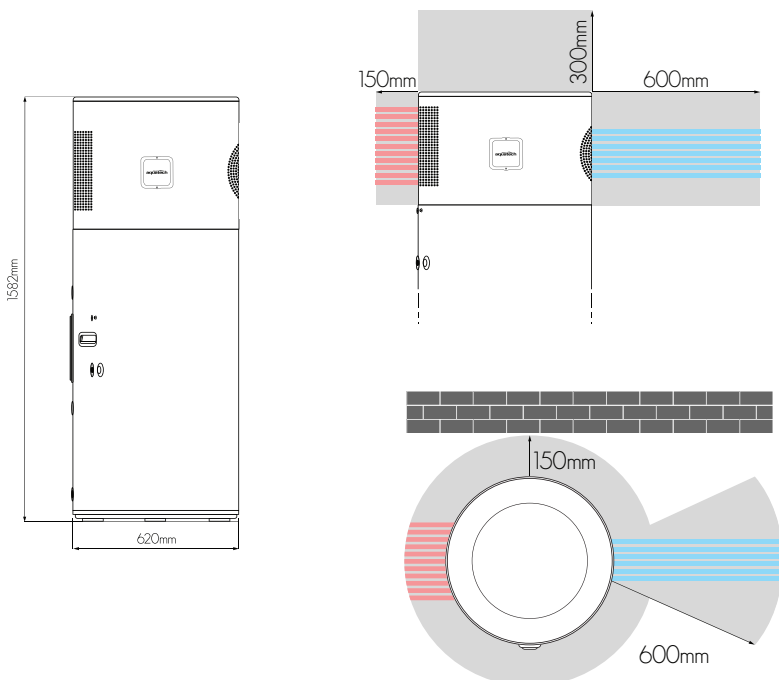

### TECHNICAL SPECIFICATIONS

Electricity Supply	220-240 V/50-60 Hz
Circuit	10 Amp/Single Phase
Power Connection	Hardwired/Isolated
Tariff Connection	Continuous/Shoulder/TOU
Compressor Rating	700-900 W
Element Rating	1800 W
Protection Class	IPX4
Refrigerant	R290 (350g)
Tank Material	Vitreous Enamel
Tank Storage Capacity	210L
Condensate Connection	1/2" Elbow (supplied)
Water Connections	3/4" G
PTR Rating	850 kPa (supplied)
ECV Rating	700 kPa (suggested)
Pressure Reduction Valve	500 kPa (max)
Tempering Valve	High Performance (suggested)
System Weight	108 kg
System Dimensions	620 mm x 1582 mm
Packed Weight	125 kg
Packed Dimensions	700 mm x 700 mm x 1750 mm
Minimum Base Size	600 mm x 600 mm

### HEATING PARAMETERS

Operating Modes	Eco, Standard, Hybrid, Hybrid+
Max. Temp. Heat pump	60°C
Max. Temp. Element	70°C
Tank Recovery (heat pump)	225 minutes*
COP (heat pump)	4.25*
Heating capacity (heat pump)	2.65kW*

\*260L with 40°C water temperature rise at 19°C air temperature

